


# SBP22-VIR75K42A



### Dimensions

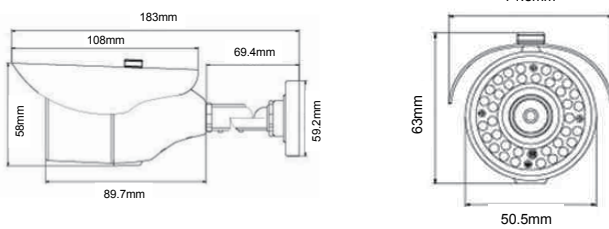

### Product Summary

- 1/3" Progressive CMOS Sensor
- 42EA IR LED
- Full HD (1920 x 1080 30P) Video Out
- WDR (Wide Dynamic Range)
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction), ACE,
- ACE (Adaptive Contrast Enhancer)
- 2.8~11mm Mega Pixel Lens
- CVBS Out (For Installer)

### Major Specifications

\* OSD Menu is subject to change without prior notice

MODEL NAME	SBP22-VIR75K42A
Image Device	1/3" SONY CMOS, 2.43Megapixel
Total Pixels	2000(H) x 1241(V) / 2,482,000 (Pixel)
Effective Pixels	1984(H) x 1225(V) / 2,430,400 (Pixel)
Scanning System	Progressive Scan
Synchronization	Internal Synchronization
Horizontal Resolution	More than 1,000 TV Lines
Video Output	HD SDI / CVBS (For Installer)
S/N Ration	More than 50dB (AGC Off)
Lens	2.8~11mm Mega Pixel Lens <b>(External Zoom &amp; Focus)</b>
LED	42 LED
Storage Temp.	14°F ~ 122°F (-10°C~ + 50°C)
Operating Temp.	4°F ~ 140°F (-20°C~ + 60°C)
Humidity	Less than 80%
Power Source	DC12V 480mA
Dimensions	70mm(Φ) X 215mm(L) X 82.2mm(H)
Net Weight	Approx. 700g